


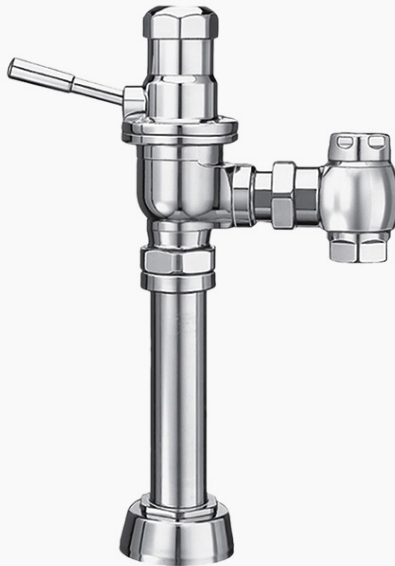

## Dolphin Manual Flushometer

### DOLPHIN 111-1.28-CP

#### Product description

1.28 gpf, Polished Chrome Finish, Fixture Connection Top Spud, Single Flush, Dolphin Exposed Manual Water Closet Flushometer.

#### Compliances & Certifications



(BAA Compliant, BREEAM Water Credit, cUPC Green Certified, Green Globes Water, IAPMO, LEED Water, Made in the USA, Satisfies LEED Credits, EPA WaterSense Listed)

#### Code 3050010

#### Finish

 Polished Chrome (CP)

#### Downloads

-  [Dolphin Standard Exposed Installation Instructions.pdf](#)
-  [Control Stop Repair and Maintenance Guide.pdf](#)
-  [Flush Connections Flanges Repair and Maintenance Guide.pdf](#)
-  [Additional Downloads](#)

#### Videos

-  [Sloan – Company Overview](#)

## Details

- Flush Volume: 1.28 gpf (4.8 lpf)
- Finish: Polished Chrome (CP)
- Valve: Piston
- Valve Body Material: Red Brass
- Fixture Type: Water Closet
- Fixture Connection: Top Spud
- Rough-in Dimension: 11.5" (292mm)
- Spud Coupling: 1.5" (38mm)
- Supply Pipe: 1" (25mm)

## Features

- Flush volume is factory set with option of adjusting volume range according to specific needs
- Flushing control mechanism functions in oil and is isolated from debris
- Water pressure not required to positively shut off
- Complies with military specifications
- Regulating screw for flush duration control
- Adjustable tailpiece
- Valve body, Cover, Tailpiece and Control Stop shall be in compliance with ASTM Alloy Classification for Red Brass
- Valve shall be in compliance to the applicable sections of ASSE 1037

## Recommended specifications

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance with the applicable sections of ASSE 1037 and ANSI/ASME 112.19.2.

## Valve Operating Pressure (Flowing)

15-80 psi (103 - 552 kPa). Specific fixtures may require greater minimum flowing pressure - consult manufacturer requirements.

## Warranty

[View Warranty Information](#)

## Notes

All information contained within this document subject to change without notice.

WaterSense compliant when used with a 1.28 gpf (4.8 lpf) WaterSense fixture.

Looking for other variations of the DOLPHIN 111 product? [View the general spec sheet with all options.](#)  
[Find a compatible urinal](#) for this flushometer.  
[Find a compatible water closet](#) for this flushometer.

